

# RS416 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY

## BRAKE SIDE EXPLODED VIEW



FOR: KAWSAKI ZX636R 2013



**PLEASE NOTE:**  
The adjustability of these rearsets will require that you install a longer hose between the rear brake master cylinder & fluid reservoir. Brake fluid hose is included in Kit. Once you decide on footpeg position hose length can be adjusted.

### INDEX

-  Lubricate
-  Red Thread Lock
-  DO NOT Overtighten
-  Use Factory Piece

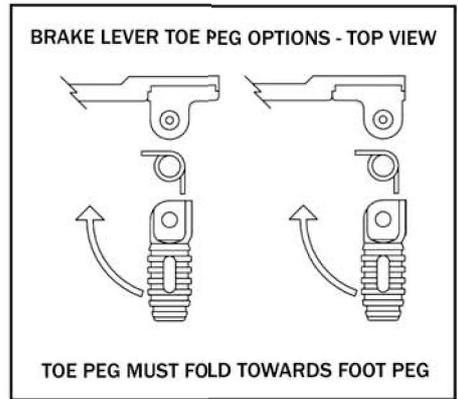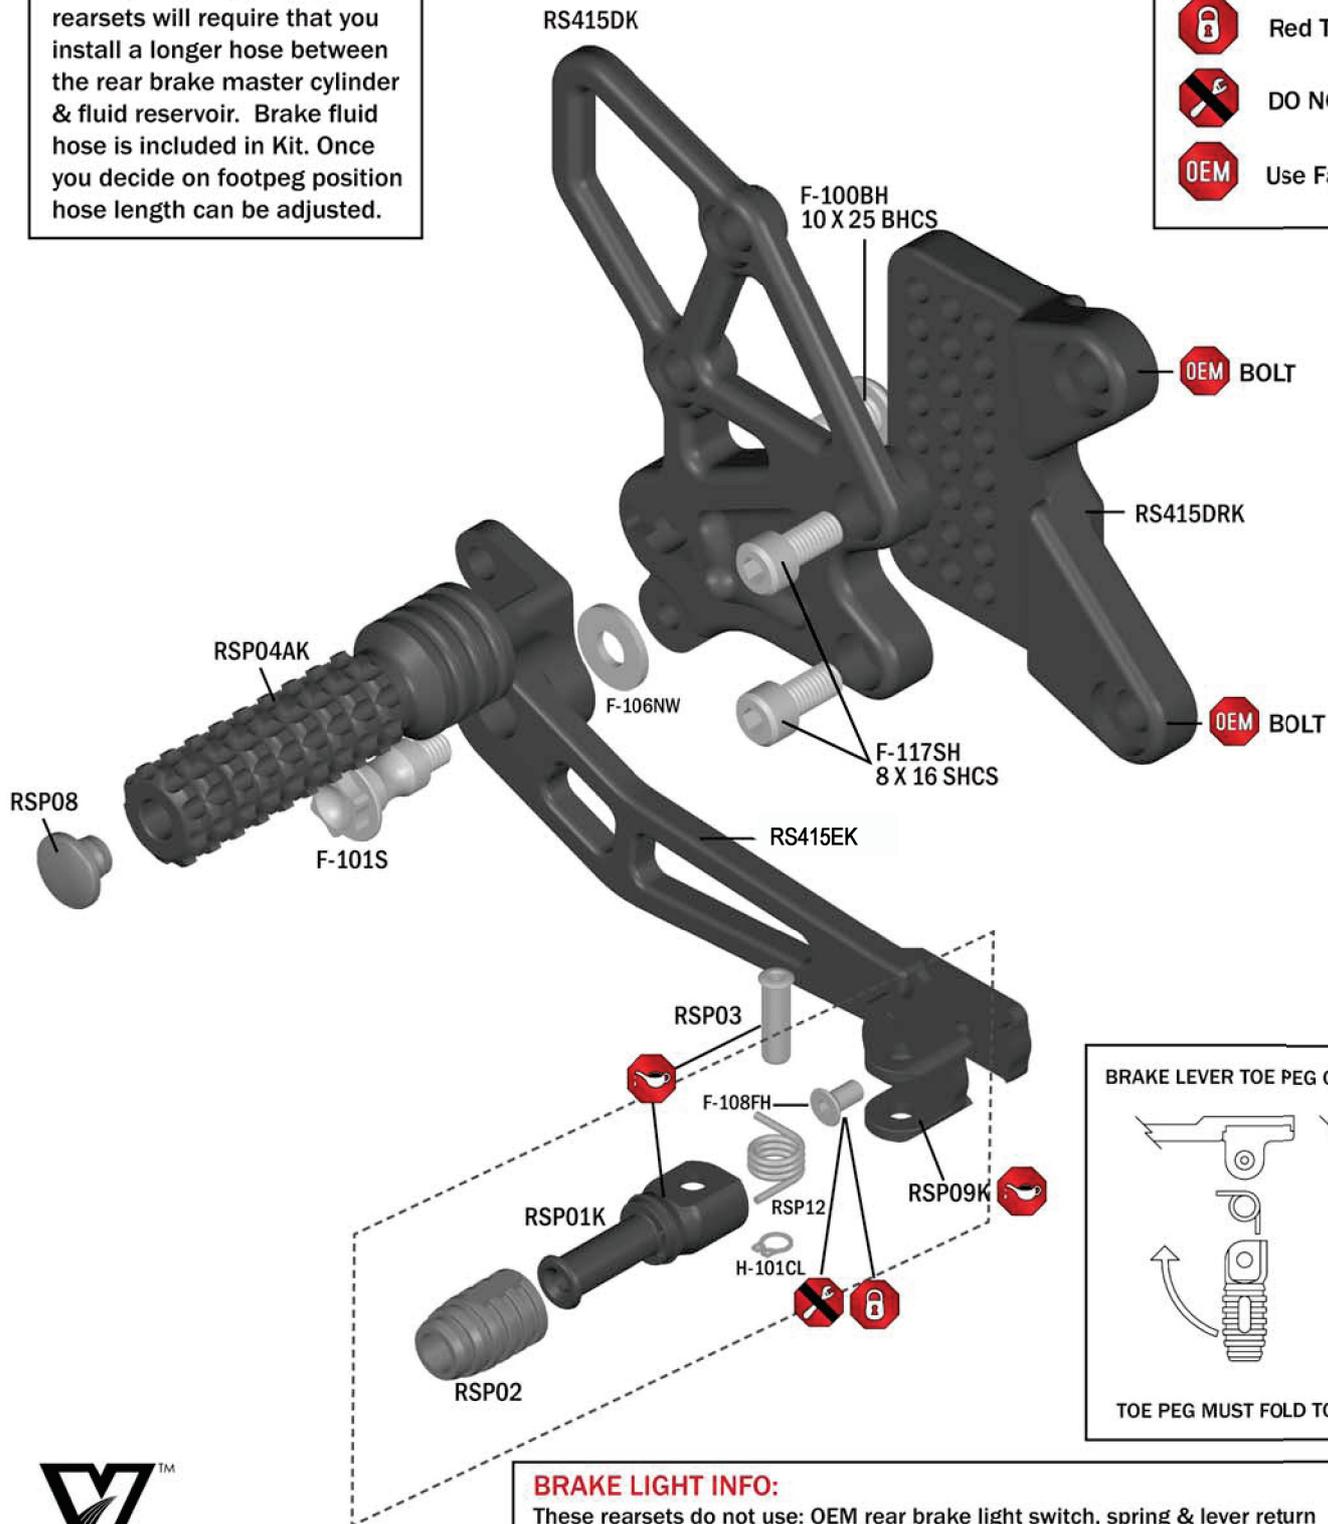

**BRAKE LIGHT INFO:**  
These rearsets do not use: OEM rear brake light switch, spring & lever return spring. In race form these rear sets no longer activate rear brake light from rear brake lever. Street use requires rear brake light to be activated by rear & front brake levers. To achieve rear brake light activation from rear brake lever use Vortex in-line pressure switch RS100.





# RS416 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY

## SHIFT SIDE EXPLODED VIEW

FOR: KAWSAKI ZX636R 2013

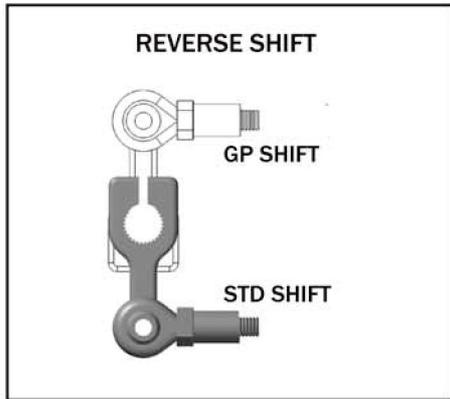

**INDEX**

- Lubricate
- Red Thread Lock
- DO NOT Overtighten
- Use Factory Piece

